


380 – 2700 MHz Directional Couplers

PARAMETERS	SPECIFICATIONS				
	6 dB Coupler	10 dB Coupler	15 dB Coupler	20 dB Coupler	30 dB Coupler
Part Number	CSG 33827 DC-06	CSG 33827 DC-10	CSG 33827 DC-15	CSG 33827 DC-20	CSG 33827 DC-30
Frequency(MHz)	380-2700 MHz				
Coupling	6±1 dB	10±1.2 dB	15±1.5 dB	20±1.5 dB	30±2.0 dB
Insertion Loss	1.8 dB	1.0 dB	0.6 dB	0.4 dB	0.3 dB
VSWR	≤ 1.30:1				
Power Rating	200 W				
Directivity	≥ 18 dB				
Connector	N-Female or DIN-Female				
Impedance	50 Ω				
Color	Black or Grey				
Temperature	-35~+75				
Application	Indoor				
Weight	0.365 kg				

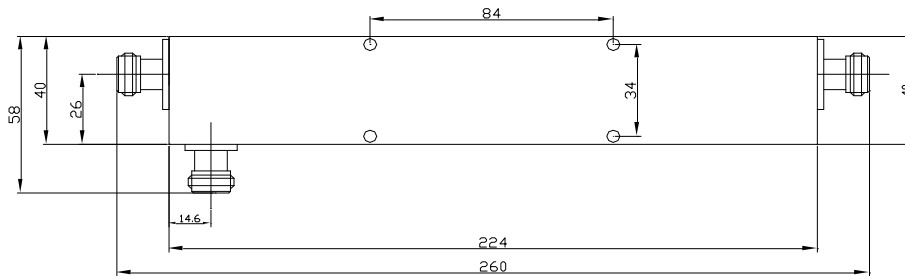

WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT