



## Description

The SC-501 is a ceiling speaker with built-in 100 volt line transformer. The transformer technique reduces line losses on longer distances and allows easy parallel connection of multiple loudspeakers.




The 5" speaker driver is designed for a wide frequency response, 110hz to 14.5khz. The multiple power taps are helpful for different applications, room size and ambient noise surroundings.

The all metal body and grille are painted in white and its spring clamp type makes for an easy and secure installation.

The ideal choice of speaker for industrial and commercial applications, hotels, schools, offices and factories where background music and general paging is required.

## Specification

Model	SC-501
Power Taps @100V	1.5W, 3W, 6W
Power Taps @70V	0.75W, 1.5W, 3W
Impedance	Black-Com Blue-1.7K $\Omega$ Green-3.3K $\Omega$ Red: 6.7K $\Omega$
SPL(1W/1M)	94dB
Max.SPL (Rated W/1M)	102dB
Frequency Response (-10dB)	110—14.5KHz
Finish	Baffle: Steel, White Grille: Steel, White
Speaker Driver	5" $\times$ 1
Cutout Size	175mm
Dimensions	200 $\times$ 55mm
Weight	0.8Kg
Mounting	Spring-clip

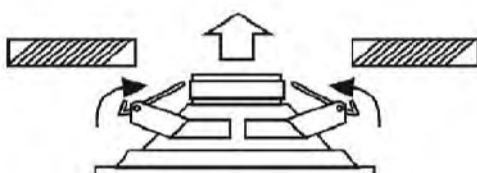



## Description


The SC-602B is a ceiling speaker with built-in 100 volt line transformer. The transformer technique reduces line losses on longer distances and allows easy parallel connection of multiple loudspeakers.

The 6" + 1.5" coaxial speaker driver is designed for a wide frequency response, 80hz to 20khz. The multiple power taps are helpful for different applications, room size and ambient noise surroundings.

The metal grille and ABS baffle are painted in white and its flush mount type makes for an easy and secure installation.

The ideal choice of speaker for industrial and commercial applications, hotels, schools, offices and factories where background music and general paging is required.

Specification	
Model	SC-602B
Power Taps @100V	10w, 5w, 2.5w & 1.25w
Power Taps @70V	5w, 2.5w, 1.25w & 0.63w
Impedance	Black: com/1kΩ/2kΩ/4kΩ/8kΩ
SPL(1W/1M)	89dB
Max.SPL (Rated W/1M)	99dB
Frequency Response (-10dB)	80hz-20khz
Finish	Baffle: ABS, white grille: Steel, white
Speaker Driver	1x 6" Cone 1x 1.5" Tweeter
Cutout Size	202mm
Dimensions	232x107mm
Weight	1kg
Mounting	Flush-mount dog ears

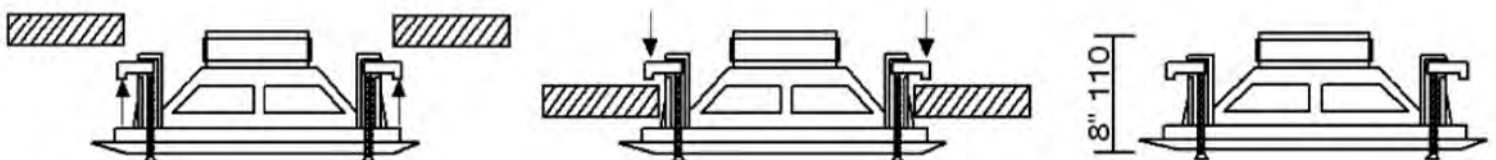



### Description


The SC802B is a ceiling speaker with built-in 100 volt line transformer. The transformer technique reduces line losses on longer distances and allows easy parallel connection of multiple loudspeakers.

The 8" + 1.5" coaxial speaker driver is designed for a wide frequency response, 80hz to 20khz. The multiple power taps are helpful for different applications, room size and ambient noise surroundings.

The metal grille and ABS baffle are painted in white and its flush mount type makes for an easy and secure installation.

The ideal choice of speaker for industrial and commercial applications, hotels, schools, offices and factories where background music and general paging is required.

Model	SC802B
Power Taps @100V	15W, 7.5W, 3.75W, 1.87W
Power Taps @70V	7.5W, 3.75W, 1.87W, 0.93W
Impedance	Black: Com/ 670Ω/1.3KΩ /2.6Ω /5.3KΩ
SPL(1W/1M)	90dB
Max.SPL (Rated W/1M)	102dB
Frequency Response (-10dB)	80-20KHz
Finish	Baffle: ABS, White Grille: Steel, White
Speaker Driver	8" ×1 1.5" ×1
Cutout Size	245mm
Dimensions	275 ×110mm
Weight	1.5Kg
Mounting	Flush-mount dog ears

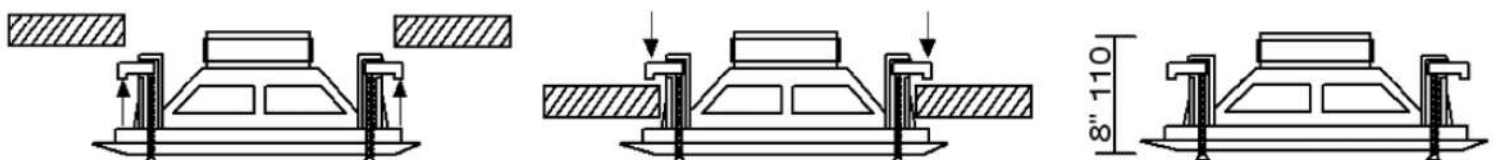

## Features

- Built-in 100v/70v transformer
- In-ceiling type loudspeaker
- Ceramic connector, thermal fuse and fire-resistant cable
- 6"+1" two ways speaker unit
- Power taps 0.38w-0.75w-1.5w-3w-6w @100V
- Metal grille, metal baffle and fire dome metal back can

## Description

The T-575 is a fireproof ceiling speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The built-in 5"+1" two ways speaker driver is designed of wide frequency response 120-18kHz, the multiple power taps 0.38W, 0.75W, 1.5W, 3W & 6W are helpful for different applications varies from room size and ambient noise surroundings.

The metal grille, metal baffle and fire dome metal back can plus ceramic connector, thermal fuse and fire-resistant cable, all of the above features make it is fireproof. Its spring clamp type makes the easy and secure installation.






This fireproof ceiling speaker is specially designed for fire alarm and voice evacuation system, which is designed and manufactured according to EN54 standard. It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.



## Specification

Model	T-575
Power Taps @100V	6W, 3W, 1.5W, 0.7W, 0.38W
Power Taps @70V	3W, 1.5W, 0.75W, 0.38W, 0.19W
Impedance	Com/1.7KΩ/3.3KΩ/6.7KΩ/13KΩ/40KΩ
SPL(1W/1M)	92dB
Max.SPL (Rated W/1M)	104dB
Frequency Response (-10dB)	120-18KHz
Finish	Baffle: Steel, White    Grille: Steel, White    Cover: Steel, Red
Speaker Driver	6" x1    1" x1
Cutout Size	207mm
Dimensions	230x126mm
Weight	1.6kg

Appearance:

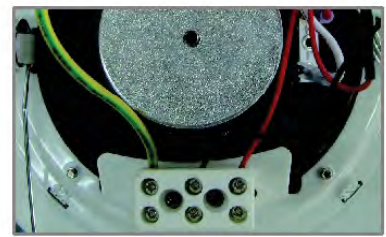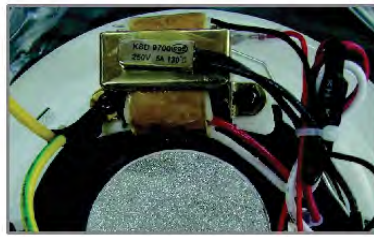

Frequency Response

