

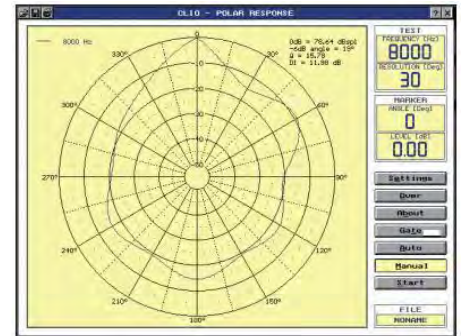
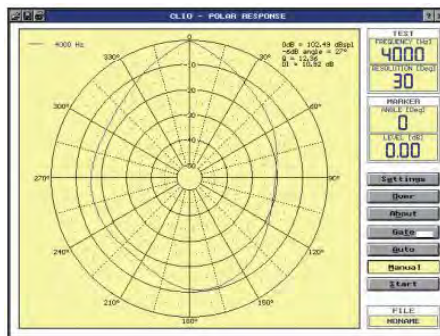


 **Specification:**






Model	SC-25T
Material	ABS
Protection Rating	IP66 Weatherproof
Power Handling	25W RMS / 38W Max
Power Taps	25W / 20W / 15W / 10W
Input	100V
Frequency Response	240Hz - 10KHz
Sensitivity	108±3dB
Dimensions (W*H*D)	300 x 180 x 315mm
Net Weight	2.0 kg

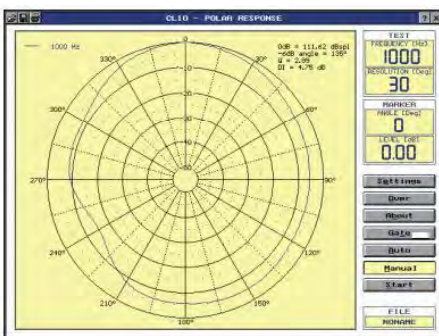

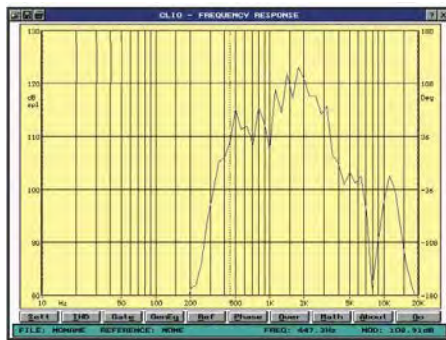

Specification:

Model	SC-40T
Material	ABS
Protection Rating	IP66 Weatherproof
Power Handling	40W RMS / 50W Max
Power Taps	40W / 30W / 20W / 10W
Input	100V
Frequency Response	240Hz - 10KHz
Sensitivity	108±3dB
Dimensions (W*H*D)	400 x 200 x 422mm
Net Weight	3.2 kg

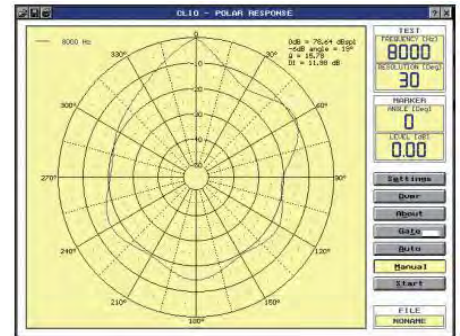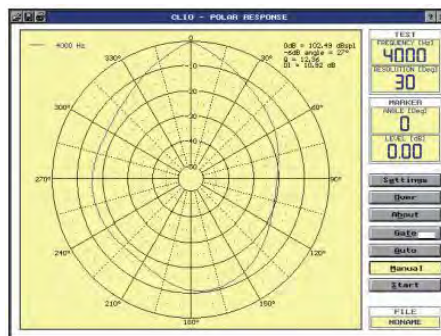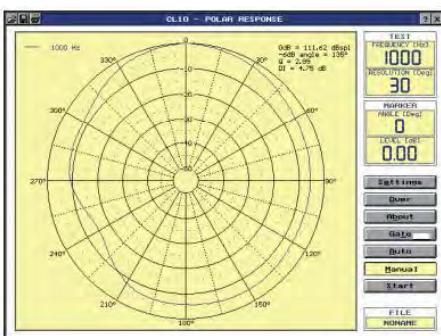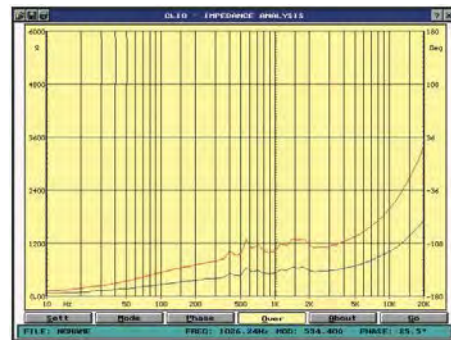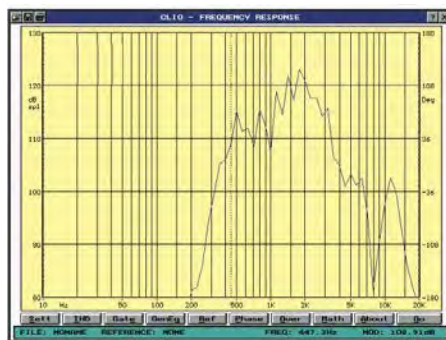



Specification:

Model	SC-30T
Material	Aluminum
Protection Rating	IP66 Weatherproof
Power Handling	30W RMS
Input	100V
Frequency Response	240Hz - 10 KHz
Sensitivity	107±3dB
Dimensions (Φ*H)	Φ325 x 355mm
Net Weight	2.7 kg

