

### Features

- Built-in 100v/70v transformer
- Wall mount type loudspeaker
- 4" +1.5" two ways speaker unit
- Power taps 2.5w-5w-10w-20w @100V plus 8ohm
- Metal grille, ABS enclosure and stainless mounting bracket

### Description

The T-774H is a wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The built-in 4"+1.5" two ways speaker driver is designed of wide frequency response 120-18kHz, the multiple power taps 2.5W, 5W, 10W & 20W are helpful for different applications varies from room size and ambient noise surroundings.

The metal grille, ABS enclosure and stainless mounting bracket are of black color. Easy and secure wall mount installation through the supplied mounting bracket.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.




### Specification

Model	T-774H	
Power Taps @100V	2.5W, 5W, 10W, 20W	
Power Taps @70V	1.25W, 2.5W, 5W, 10W, 20W	
Transformer Impedance	4KΩ/2KΩ/1KΩ/500Ω/250Ω	
Input	70V/100V/8Ω	
SPL(1W/1M)	86dB	
Max. SPL (Rated W/1M)	99dB	
Frequency Response (-10dB)	120-18KHz	
Finish	Baffle: ABS, Black/White	Grille: Steel, Black/White
Speaker Driver	4" x1	1.5" x1
Dimensions	276 x170 x 170mm	
Weight	2.3kg	
Mounting	With mounting bracket fixed by screw	


Appearance:



Direction Diagram:

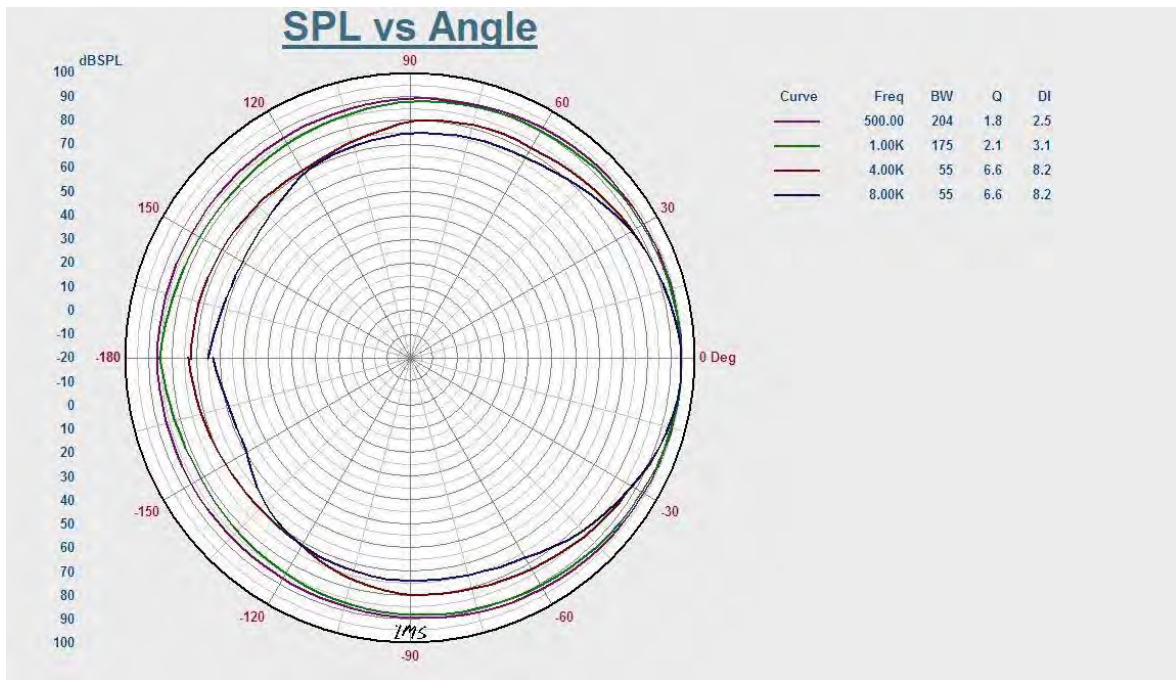

Frequency Response:

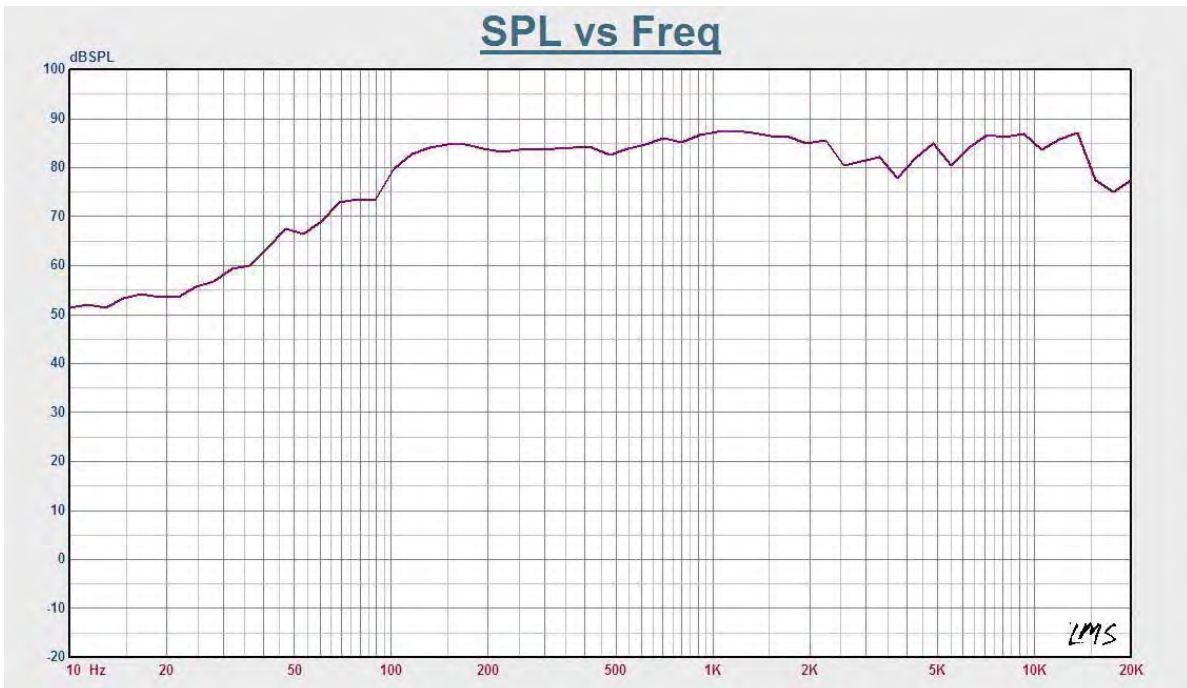

### Features

- Built-in 100v/70v transformer
- Wall mount type loudspeaker
- 4" +1.5" two ways speaker unit
- Power taps 2.5w-5w-10w-20w @100V plus 8ohm
- Metal grille, ABS enclosure and stainless mounting bracket

### Description

The T-774HW is a wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The built-in 4"+1.5" two ways speaker driver is designed of wide frequency response 120-18kHz, the multiple power taps 2.5W, 5W, 10W & 20W are helpful for different applications varies from room size and ambient noise surroundings.

The metal grille, ABS enclosure and stainless mounting bracket are of white color. Easy and secure wall mount installation through the supplied mounting bracket.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.




### Specification

Model	T-774HW	
Power Taps @100V	2.5W, 5W, 10W, 20W	
Power Taps @70V	1.25W, 2.5W, 5W, 10W, 20W	
Transformer Impedance	4KΩ/2KΩ/1KΩ/500Ω/250Ω	
Input	70V/100V/8Ω	
SPL(1W/1M)	86dB	
Max. SPL (Rated W/1M)	99dB	
Frequency Response (-10dB)	120-18KHz	
Finish	Baffle: ABS, Black/White	Grille: Steel, Black/White
Speaker Driver	4" x 1	1.5" x 1
Dimensions	276 x 170 x 170mm	
Weight	2.3kg	
Mounting	With mounting bracket fixed by screw	


Appearance:



Direction Diagram:

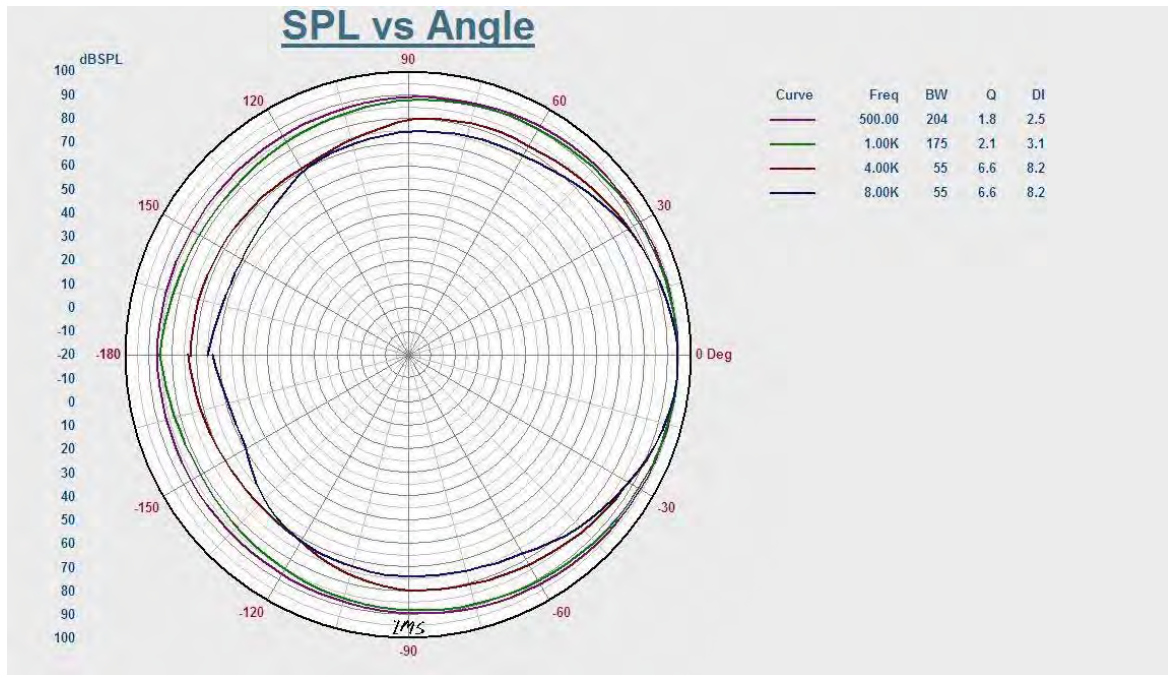

Frequency Response:

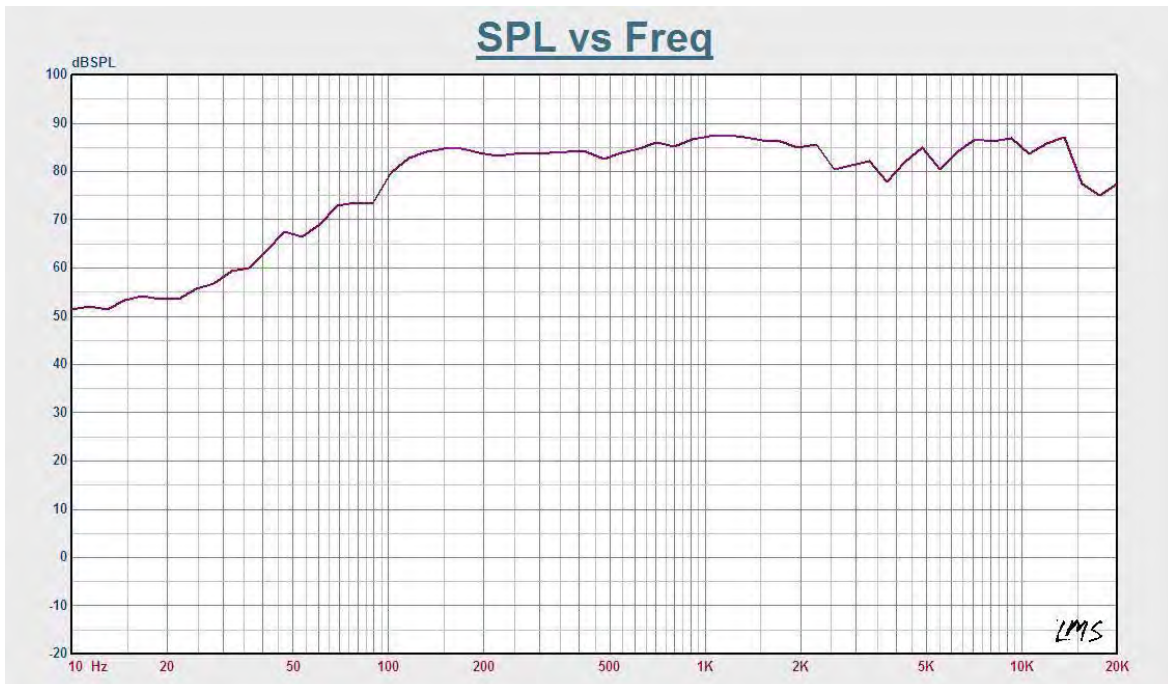

### Features

- Built-in 100v/70v transformer
- Wall mount type loudspeaker
- 5" +1.5" two ways speaker unit
- Power taps 3.75w-7.5w-15w-30w @100V plus 8ohm
- Metal grille, ABS enclosure and stainless mounting bracket

### Description

The T-775HW is a wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The built-in 5"+1.5" two ways speaker driver is designed of wide frequency response 100-18kHz, the multiple power taps 3.75W, 7.5W, 15W & 30W are helpful for different applications varies from room size and ambient noise surroundings.

The metal grille, ABS enclosure and stainless mounting bracket are of white color. Easy and secure wall mount installation through the supplied mounting bracket.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.




### Specification

Model	T-775HW	
Power Taps @100V	3.75W, 7.5W, 15W, 30W	
Power Taps @70V	1.9W, 3.75W, 7.5W, 15W, 30W	
Transformer Impedance	2.6KΩ/1.3KΩ/670Ω/330Ω/165Ω	
Input	70V/100V/8Ω	
SPL(1W/1M)	88dB	
Max. SPL (Rated W/1M)	103dB	
Frequency Response (-10dB)	100-18KHz	
Finish	Baffle: ABS, Black/White	Grille: Steel, Black/White
Speaker Driver	5" x1	1.5"x 1
Dimensions	285x 180 x 186mm	
Weight	2.7kg	
Mounting	With mounting bracket fixed by screw	


**Appearance:**



**Direction Diagram:**

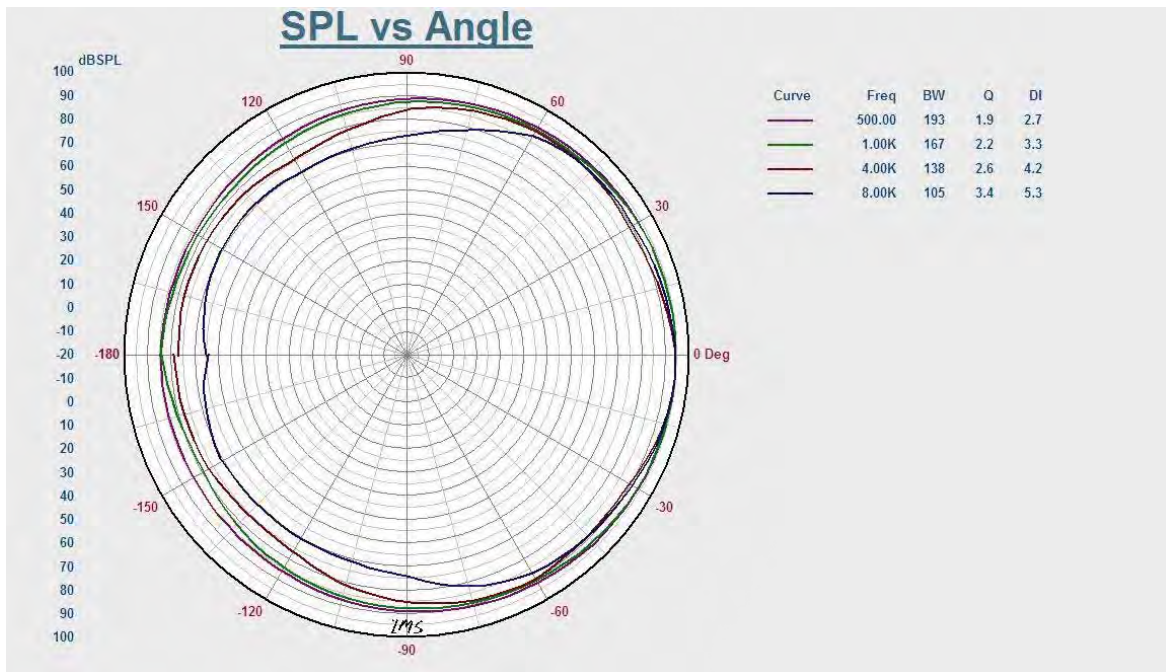

**Frequency Response:**

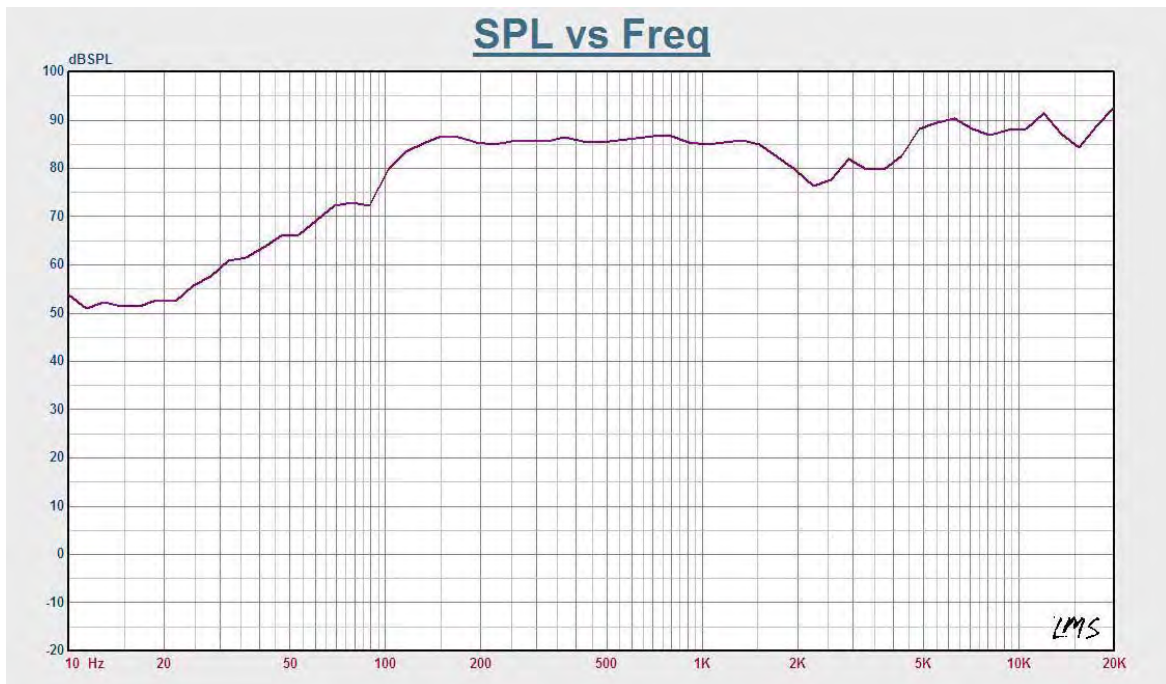

**Features**

- Built-in 100v/70v transformer
- Wall mount type loudspeaker
- 6" +1.5" two ways speaker unit
- Power taps 5w-10w-20w-40w @100V plus 8ohm
- Metal grille, ABS enclosure and stainless mounting bracket
- Fashion speaker of white color

**Description**

The T-776HW is a wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The built-in 6"+1.5" two ways speaker driver is designed of wide frequency response 100-20kHz, the multiple power taps 5W, 10W, 20W & 40W are helpful for different applications varies from room size and ambient noise surroundings.

The metal grille, ABS enclosure and stainless mounting bracket are of white color. Easy and secure wall mount installation through the supplied mounting bracket.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.




**Specification**

Model	T-776HW
Power Taps @100V	5W, 10W, 20W, 40W
Power Taps @70V	2.5W, 5W, 10W, 20W, 40W
Transformer Impedance	2KΩ/1KΩ/500Ω/250Ω/125Ω
Input	70V/100V/8Ω
SPL(1W/1M)	89dB
Max. SPL (Rated W/1M)	105dB
Frequency Response (-10dB)	100-20KHz
Finish	Baffle: ABS, Black/White      Grille: Steel, Black/White
Speaker Driver	6" x 1      1.5" x 1
Dimensions	340 x 220 x 225mm
Weight	4.1kg
Mounting	With mounting bracket fixed by screw


Appearance:



Direction Diagram:

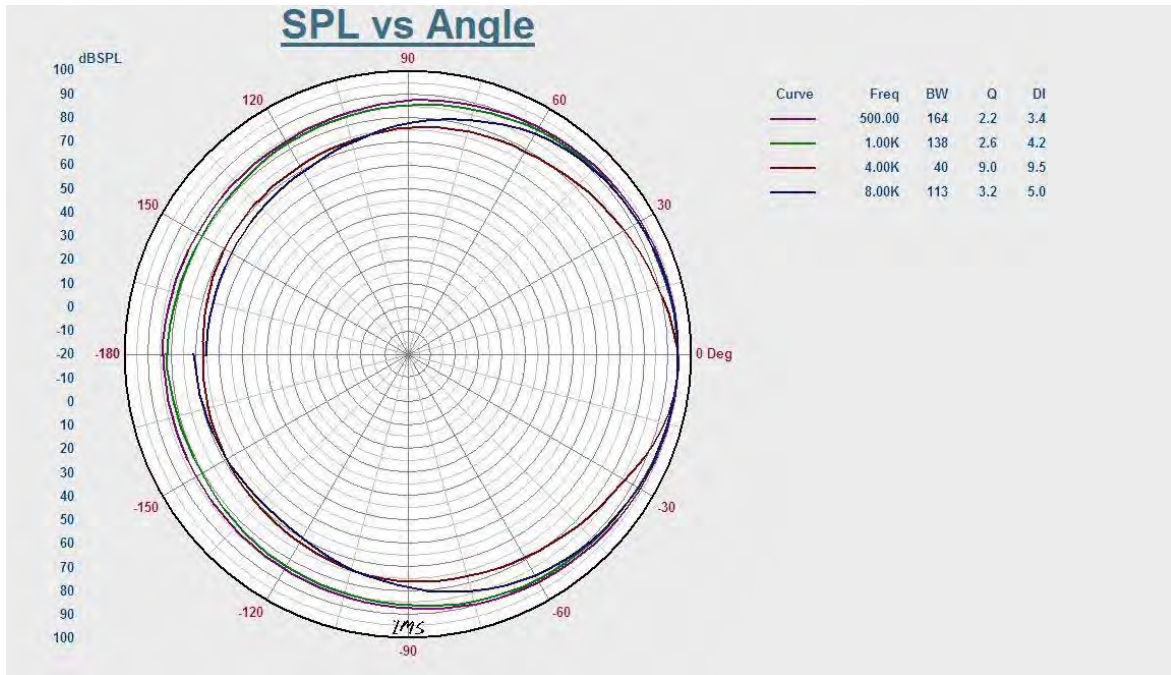

Frequency Response:

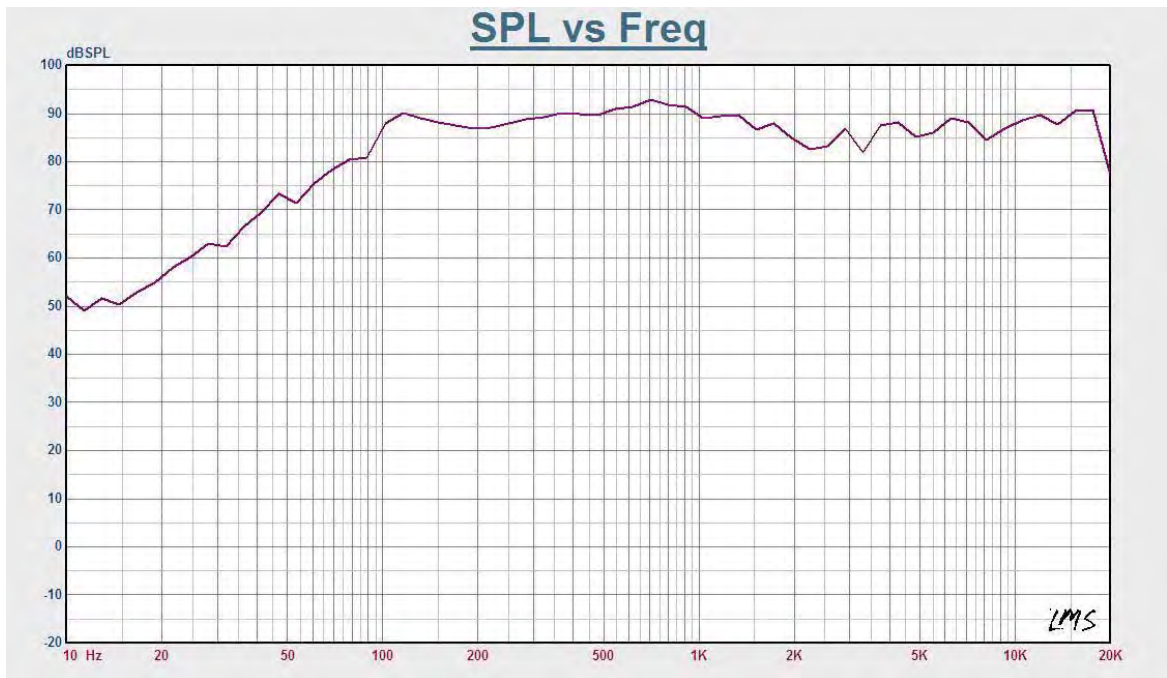



**Features**

- Built-in 100v/70v transformer
- Wall mount type loudspeaker
- 8" +1.5" two ways speaker unit
- Power taps 7.5W,15W, 30W & 60W @100V plus 8ohm
- Metal grille, ABS enclosure and stainless mounting bracket
- Fashion speaker of black color

**Description**

The T-778H is a wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The built-in 8"+1.5" two ways speaker driver is designed of wide frequency response 100-20kHz, the multiple power taps 7.5W, 15W, 30W & 60W are helpful for different applications varies from room size and ambient noise surroundings.

The metal grille, ABS enclosure and stainless mounting bracket are of black color. Easy and secure wall mount installation through the supplied mounting bracket.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.




**Specification**

Model	T-778H	
Power Taps @100V	7.5W, 15W, 30W, 60W	
Power Taps @70V	3.75W, 7.5W, 15W, 30W, 60W	
Transformer Impedance	1.3KΩ/670Ω/330Ω/165Ω/81Ω	
Input	70V/100V/8Ω	
SPL(1W/1M)	89dB	
Max. SPL (Rated W/1M)	112dB	
Frequency Response (-10dB)	100-20KHz	
Finish	Baffle: ABS, Black/White	Grille: Steel, Black/White
Speaker Driver	8" x 1	2"x1
Dimensions	450 x295 x290mm	
Weight	6.5kg	
Mounting	With mounting bracket fixed by screw	

Appearance:



Direction Diagram:

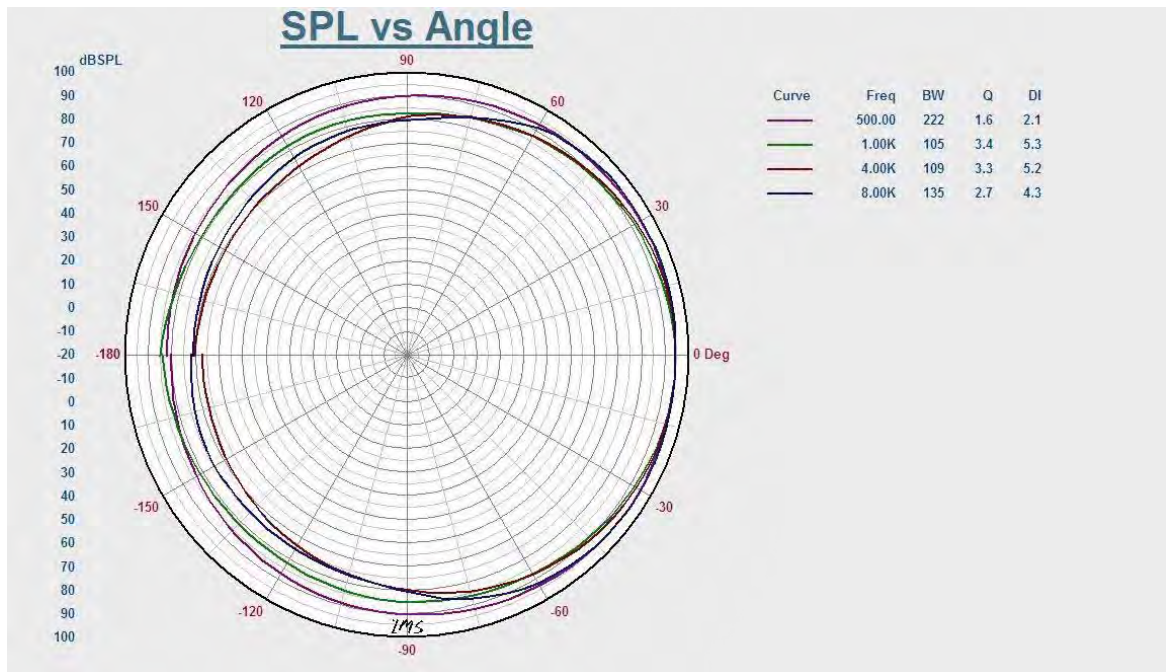

Frequency Response:

