
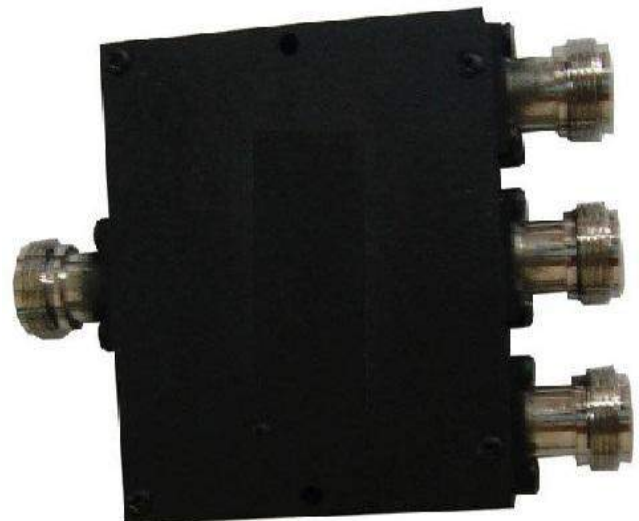


## VHF+UHF 3 Way Power Splitter CSG 310050050-3NW

| PARAMETERS            | SPECIFICATIONS    |
|-----------------------|-------------------|
| Frequency Band        | 100-500 MHz       |
| Impedence             | 50 Ohm/Nominal    |
| Insertion Loss        | ≤0.8 dB           |
| VSWR                  | ≤1.4              |
| Isolation Rate        | ≥18 dB            |
| Input Power           | ≤50 W             |
| Input Connector       | N-Female          |
| Weight                | 530g              |
| Dimension             | 140 x 100 x 18 mm |
| Housing Material      | Aluminum          |
| Operating Temperature | -40 ~ +80°C       |

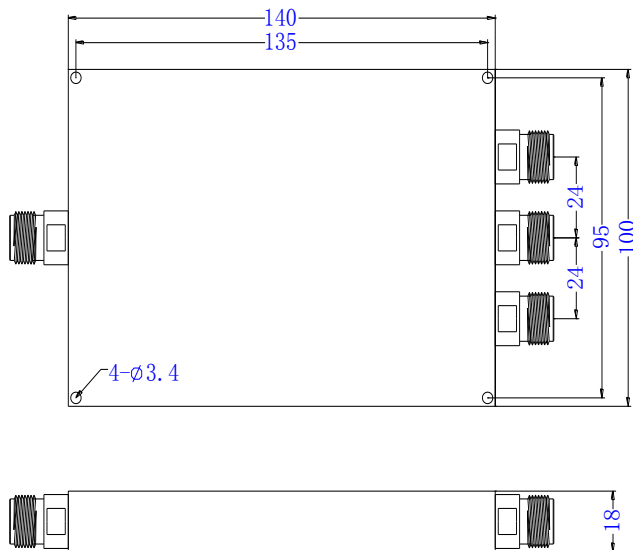

**WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT**

## VHF+UHF 2 Way Power Splitter CSG 38055050-2NW

| PARAMETERS            | SPECIFICATIONS         |
|-----------------------|------------------------|
| Frequency Band        | 80-550MHz              |
| Impedence             | 50 $\Omega$            |
| Split Loss            | $\leq 3.70$ dB         |
| Insertion Loss        | $\leq 0.70$ dB         |
| VSWR                  | $\leq 1.3$             |
| Input Power           | $\leq 50$ Watt         |
| Input Connector       | N (Female)             |
| Dimensions (Approx.)  | 125 x 80 x 20 mm       |
| Weight (Approx.)      | 400 gram               |
| Operating Temperature | -30 ~ +70 $^{\circ}$ C |
| Environmental         | Indoor Application     |



**WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT**